



ON-CENTRE CHART

Glass panels are 38.82" tall to be used for a 42" rail height. Spans shown in the stainless steel (SS) connector chart assume that the 2mm backing plates are used with connectors.


The only location that the 2mm backing plate cannot be used is on the face of the angle brackets (45-degree wedge or UAB.)

When referencing this chart to position your posts be sure to ADD the spacer dimension where indicated on your layout.

Sheet Name	Glass Size	inside to inside Lite 10	o/c Visti 2-1/4" w/ Lite 10	o/c ALX 2-1/2" w/ Lite 10
A	69.812	70 1/2		
B	67.865	68 9/16	70 13/16	71 1/16
C	65.342	66	68 1/4	68 1/2
D	62.342	63	65 1/4	65 1/2
E	59.342	60	62 1/4	62 1/2
F	57.812	58 1/2	60 3/4	61
G	55.865	56 9/16	58 13/16	59 1/16
H	53.342	54	56 1/4	56 1/2
I	51.812	52 1/2	54 3/4	55
J	49.865	50 9/16	52 13/16	53 1/16
K	47.342	48	50 1/4	50 1/2
L	44.342	45	47 1/4	47 1/2
M	41.342	42	44 1/4	44 1/2
M2	38.342	39	41 1/4	41 1/2
N	35.342	36	38 1/4	38 1/2
N2	32.342	33	35 1/4	35 1/2
O	29.342	30	32 1/4	32 1/2
O2	26.342	27	29 1/4	29 1/2
P	23.342	24	26 1/4	26 1/2
P2	20.342	21	23 1/4	23 1/2
Q	17.342	18	20 1/4	20 1/2
Q2	14.342	15	17 1/4	17 1/2
R	11.342	12	14 1/4	14 1/2

Sheet Name	Glass Size	inside to	o/c	o/c	o/c	o/c
		inside w/ SS connectors	SS Invisi w/ SS connectors	Painted Invisi w/ SS connectors	Visti 2-1/4" w/ SS connectors	ALX 2-1/2" w/ SS connectors
A	69.812	71 3/4	72	72		
B	67.865	69 3/4	70 1/16	70 1/8	72	
C	65.342	67 1/4	67 9/16	67 5/8	69 1/2	69 3/4
D	62.342	64 1/4	64 9/16	64 5/8	66 1/2	66 3/4
E	59.342	61 1/4	61 9/16	61 5/8	63 1/2	63 3/4
F	57.812	59 3/4	60 1/16	60 1/8	62	62 1/4
G	55.865	57 3/4	58 1/16	58 1/8	60	60 1/4
H	53.342	55 1/4	55 9/16	55 5/8	57 1/2	57 3/4
I	51.812	53 3/4	54 1/16	54 1/8	56	56 1/4
J	49.865	51 3/4	52 1/16	52 1/8	54	54 1/4
K	47.342	49 1/4	49 9/16	49 5/8	51 1/2	51 3/4
L	44.342	46 1/4	46 9/16	46 5/8	48 1/2	48 3/4
M	41.342	43 1/4	43 9/16	43 5/8	45 1/2	45 3/4
M2	38.342	40 1/4	40 9/16	40 5/8	42 1/2	42 3/4
N	35.342	37 1/4	37 9/16	37 5/8	39 1/2	39 3/4
N2	32.342	34 1/4	34 9/16	34 5/8	36 1/2	36 3/4
O	29.342	31 1/4	31 9/16	31 5/8	33 1/2	33 3/4
O2	26.342	28 1/4	28 9/16	28 5/8	30 1/2	30 3/4
P	23.342	25 1/4	25 9/16	25 5/8	27 1/2	27 3/4
P2	20.342	22 1/4	22 9/16	22 5/8	24 1/2	24 3/4
Q	17.342	19 1/4	19 9/16	19 5/8	21 1/2	21 3/4
Q2	14.342	16 1/4	16 9/16	16 5/8	18 1/2	18 3/4
R	11.342	13 1/4	13 9/16	13 5/8	15 1/2	15 3/4

- 10MM CLEAR TEMPERED HEAT SOAKED
- DUBBED CORNERS
- POLISHED ALL
- 2 X TOP HOLES AS PER DETAIL "A"
- 2 X BOTTOM NOTCHES AS PER DETAIL "B"

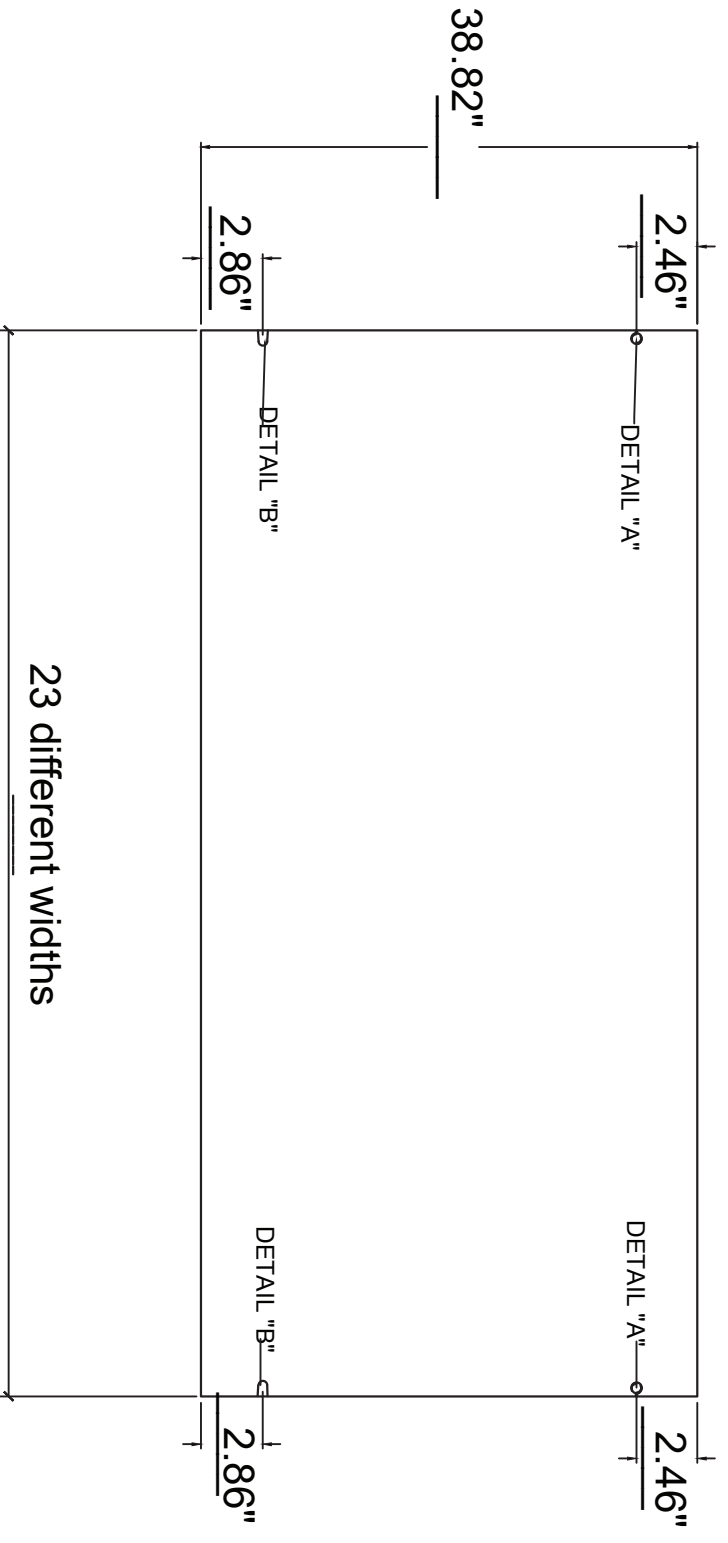

Standard 10mm Glass